

Add : Town House Cordoba 59 Kamal Muara, Penjaringan, Jakarta Utara 14470

Tel: (021) 225 743 51 HP: +62 822 9888 9558










WWW.HANGCHA.CO.ID





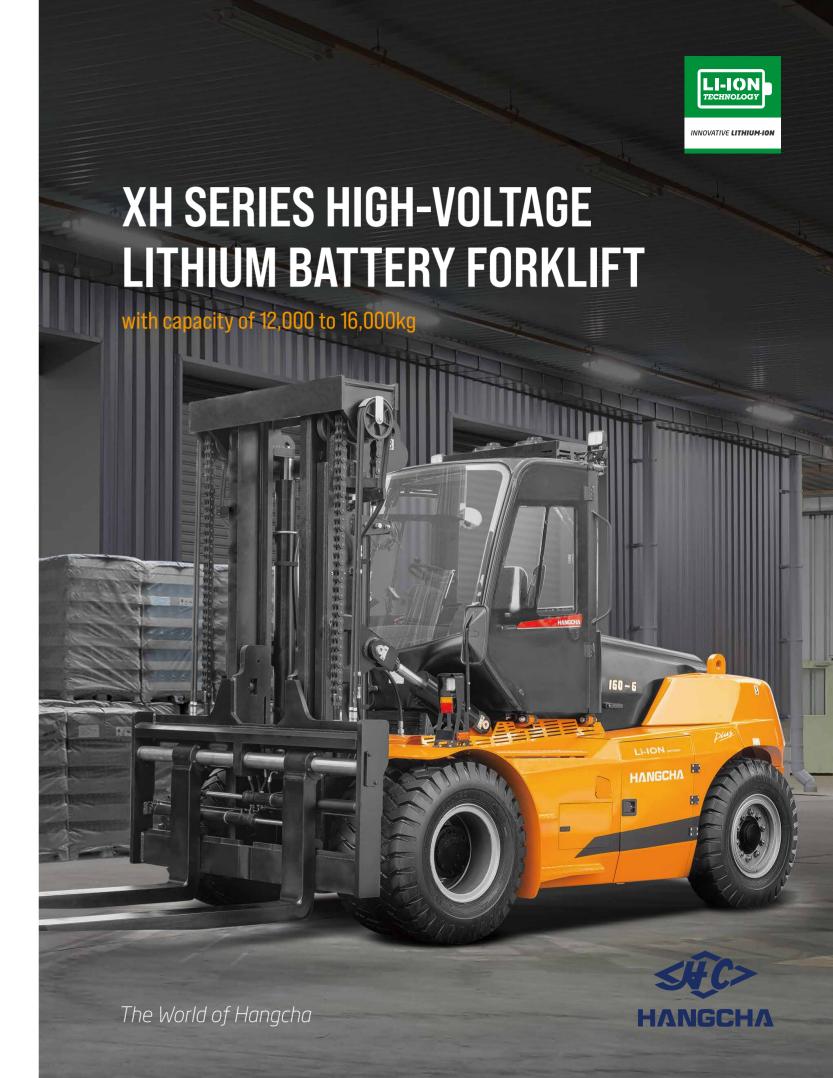



THE DIME

FOR YOUR BUSINESS

HANGCHA

XH series high-voltage lithium battery forklifts are new series of high-voltage lithium battery forklifts independently developed by Hangcha relying on the new energy automobile voltage platform for the first time based on the deep understanding of electric forklifts and internal combustion forklifts for decades by breaking through the traditional design concept. The series of models redefine electric forklifts in terms of efficiency, power and reliability, and replace the internal combustion with electric forklifts.

VOLTAGE

541 V

MAX. GRADEABILITY

30%

WATER RESISTANCE

IPX4

SPEED MODELS

3

TRAVEL SPEED

27km/h

PROTECTION RATE

IP67

Exterior

/ Following the appearance of X series internal combustion forklifts, the series boast smooth and powerful contour lines, and exquisite and compact vehicle body, presenting both fashion and steadiness as a whole.

COMMITTED TO IMPROVING

FASTER & MORE EFFICIENCY.

Compared with low-voltage lithium battery forklifts, high-voltage lithium battery technology can save about 40% of the overall cost during the service cycle.

40%

Low Voltage Lithium
Battery Forklift
Hangcha High Voltage
Lithium Electric Forklift



Compared with fuel forklifts, high-voltage lithium battery technology can save about 90% of the overall cost during the service cycle.

90%

Fuel Forklift

Lithium Electric Forklift



4000 RVALES DE CUADRIMO



Under normal charging and discharging conditions, the lithium battery of Hangcha products has a capacity retention rate of more than 75% and a life span of up to 10 years after 4000 cycles of charging and discharging.

Through disruptive battery and fast charging technology, the charging time is greatly shortened.

Get the battery fully charge:

.5h 10h

Hangcha High Voltage Electric Forklift Electric Forklift

POWER PERFORMANCE COMPARISON

	High Voltage Lithium Electric Forklift	Fuel Forklift
Travel speed, laden/unladen	26/27km/h	15-20km/h
Lift speed, laden/unladen	400/500mm/s	430/470mm/s
Max. gradeability, S2=5min, laden/unladen	30%	15%-20%

Fast charging makes it possible for the whole vehicle to work continuously, shortening the waiting time and greatly improving efficiency.

HIGH-VOLTAGE

123.3Kwh

Batte

Battery capaci

EXCELLENT ERGONOMIC DESIGN

Comfort

- / The wide-view mast with optimized design is unlikely to obstruct the operator's line of sight. The enlarged opening size of the fork carriage enables a wider view, a large operation space, and excellent ergonomic design.
- / The multifunctional color-screen instruments are designed to have graphical interfaces and display data clearly. The interfaces can be switched to be shown in Chinese and English to meet the needs of customers at home and abroad.
- / The new fully-suspended cab with panoramic view enables a clearer view. Performance of the air conditioner is improved to enable uniform conditioned air blowing from the air outlet and a strong cooling effect. The waterproof, dust-proof, heatproof, soundproof, noise-reducing sealing design improves driving comfort. The molded interior parts enable a more comfortable feel. The integral frame is constituted by profiled steel pipes. The structural parts have higher strength.
- / Integrated handle and pilot remote control allow flexible and accurate operation; hydraulic brake curve is optimized to achieve smooth and easy-to-control braking; suspension seat, following the floating multi-direction adjustable control platform, is comfortable to control.









Intelligent

- / A vehicle central controller is provided, which has bus architecture, several built-in diagnosis and management functions and a central fault alarm function.
- / An optional intelligent management system is provided to enable intelligent remote monitoring and easier equipment management and logistics management.





Maintainability

- / The over-turnable cab and electric tipping cylinder make tipping easier and more labor-saving.
- / The wide-opened hood better facilitate repair and maintenance of electrical components.



Standard Specification

- / Duplex wide-view mast
- / Hydraulic prong adjustment
- / Standard fork
- / Cab
- / Cooling and heating air conditioner
- / Fully hydraulic power steering
- / Quadruple multi-way valve
- / Chair sensing system
- / Steering wheel adjusting device
- / Self-locking valve in the tilting fuel circuit
- / Speed limit valve in the lifting fuel circuit
- / Traction device
- / Main power switch
- / Reversing radar
- / LCD bus instrument
- / Neutral indicator
- / Accumulator low pressure alarm
- / Hydraulic oil filter alarm
- / Vehicle LED lights
- / Pneumatic tire
- / Reverse buzzer
- / Snail horn
- / Manual/electric tipping pump
- / Armrest's multi-directional adjustment device
- / Vehicle toolkit
- / Multi-function color-screen combination instrument
- / Standard lithium battery box
- / Water chilling unit for lithium battery
- / Maintenance-free 24V lead-acid battery
- / Integrated controller (PDU+DC/DC+MCU)
- / Two-in-one oil pump motor controller
- / VCU controller
- / MSD maintenance switch
- / Emergency power off switch
- / Water chilling unit for electric control and motor
- / Automatic fire extinguisher for lithium battery
- / Cab fan

Options

- / User specified color
- / Forks of Others specifications
- / Masts of Others specifications
- / Solid tire
- / Vehicle intercom
- / Reverse voice buzzer
- / Electronic alarm light (with/without a control switch)
- / Rear view system (optional with memory)
- / Front and rear view systems (optional with memory)
- / Fire extinguisher (2kg/4kg)
- / Mast LED operation light
- / Four-channel driving record system
- / Speed limit
- / Blue light
- / Weighing system

Optional battery list

Capacity (Ah)	12-16t 541V	12-16t 608V
228	•	_
302	_	0

Note: • Standard battery capacity; O Optional battery capacity; — Null